


Technical sheet: S 55

CORNER GUARDS 55



UV Rays stability

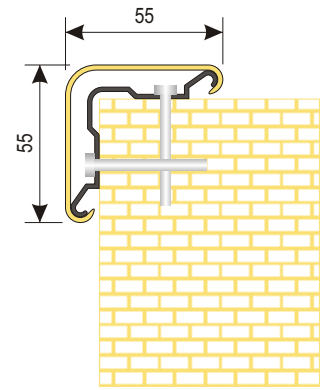

Thanks to their special formula, the materials we use are absolutely stable against UV rays artificial lights thus ensuring unalterable colours over a long time.

Flame-retardant



Certified laboratory tests testing the reaction to fire, have rated the plastic materials we use as class 1 flame-retardant material.

Recyclable and eco-friendly



A special attention is also paid to the environment, because "Styla" products are made of fully recyclable materials.

Antishock



The materials we use are particularly resistant to impacts, scratches or abrasions, which, in any case, are made almost invisible thanks to the first coloured process used for the materials and to the slightly embossed surface.

Easy to clean



The acrovynilic materials we use are non-toxic and non-porous, thus never becoming a breeding-ground for germs. Anyway, they can be easily cleaned by using any non-abrasive detergent.

Chemical agents resistant




The tests carried out reveal that the chemical resistance of the materials we use is particularly high against the most common chemical agents.

Warranty



Thanks to the quality of the materials in use, "Styla" is able to offer a five-year guarantee on all its products for manufacturing or installation defects (see the warranty certificate).

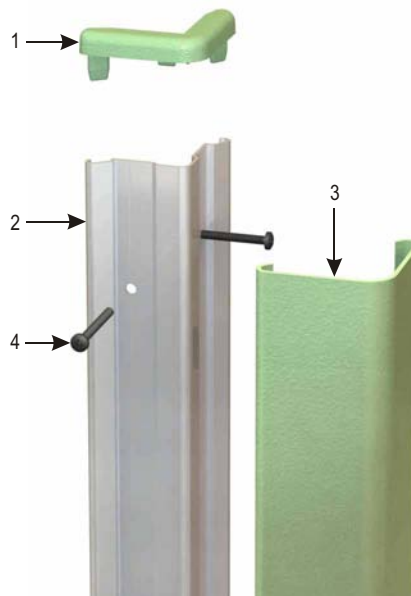

- 1) Moulded acrovynil end cap
- 2) Extruded aluminium profile
- 3) Coloured acrovynil antishock profile
- 4) Wall fixing screws

Description

Crash elastic absorption protection for the 90° building corners.

Installation

Wall fixing by plugs.

Material

Anti-collision profile in coloured first acrovynil material, with a lightly embossed surface finishing, and assembled on a high rigidity extruded aluminium structural core. End caps in coloured first moulded acrovynil, with a lightly embossed surface finishing.


Size

Height 1,5 m or 2 m
Aluminium thickness 1,5 mm
Acrovynil profile thickness 2 ±2,5 mm

Calculation parameter

At number

Standard colours (RAL)




STYLA
wall protections

via Enrico Fermi, 52/o
24035 Curno (Bergamo) - Italia
tel. +39 035 46.12.00
fax +39 035 46.20.99
www.styla.it styla@seberg.it

Technical sheet: S 75

CORNER GUARDS 75

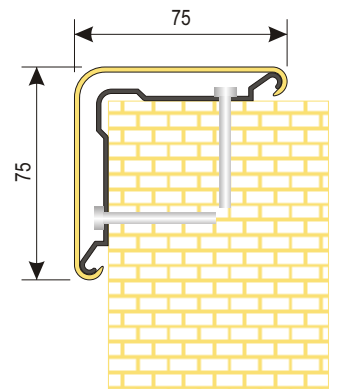

UV Rays stability



Thanks to their special formula, the materials we use are absolutely stable against UV rays artificial lights thus ensuring unalterable colours over a long time.

Flame-retardant



Certified laboratory tests testing the reaction to fire, have rated the plastic materials we use as class 1 flame-retardant material.

Recyclable and eco-friendly



A special attention is also paid to the environment, because "Styla" products are made of fully recyclable materials.

Antishock



The materials we use are particularly resistant to impacts, scratches or abrasions, which, in any case, are made almost invisible thanks to the first coloured process used for the materials and to the slightly embossed surface.

Easy to clean



The acrovynilic materials we use are non-toxic and non-porous, thus never becoming a breeding-ground for germs. Anyway, they can be easily cleaned by using any non-abrasive detergent.

Chemical agents resistant




The tests carried out reveal that the chemical resistance of the materials we use is particularly high against the most common chemical agents.

Warranty



Thanks to the quality of the materials in use, "Styla" is able to offer a five-year guarantee on all its products for manufacturing or installation defects (see the warranty certificate).

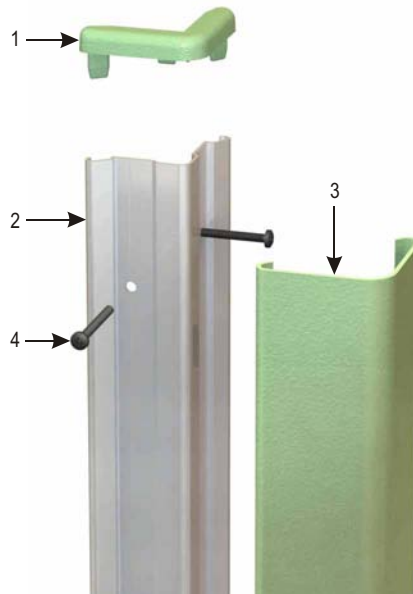

- 1) Moulded acrovynil end cap
- 2) Extruded aluminium profile
- 3) Coloured acrovynil antishock profile
- 4) Wall fixing screws

Description

Crash elastic absorption protection for the 90° building corners.

Installation

Wall fixing by plugs.

Material

Anti-collision profile in coloured first acrovynil material, with a lightly embossed surface finishing, and assembled on a high rigidity extruded aluminium structural core. End caps in coloured first moulded acrovynil, with a lightly embossed surface finishing.


Size

Height 1,5 m or 2 m
Aluminium thickness 1,5 mm
Acrovynil profile thickness 2 ±2,5 mm

Calculation parameter

At number

Standard colours (RAL)



STYLA
wall protections

via Enrico Fermi, 52/o
24035 Curno (Bergamo) - Italia
tel. +39 035 46.12.00
fax +39 035 46.20.99
www.styla.it styla@seberg.it